

Challenging the limits of low hydrogen Seamless Flux Cored Wire

SL-71

Introduction to Hyundai's Seamless Flux Cored Wires



Within FCAW (Flux Cored Arc Welding), seamless cored wires offer optimal protection against moisture reabsorption. During use, moisture cannot penetrate into the filling since there is no closed seam running over the wire length. This extremely low level of diffusible hydrogen prevents the weld from hydrogen induced cracking or cold cracking.

SL-71 is a seamless rutile flux cored wire applicable for all-positional welding with 100% CO₂ shielding gas. Thanks to its unique seamless structure, SL-71 generates low spatter and has excellent impact properties in low temperature.

These properties make SL-71 the perfect seamless cored wire for industries such as shipbuilding, steel construction, bridges, offshore, pipes, and pressure vessels.


FCAW

Specifications


- AWS A5.20 E71T-1C/-9C H4
- EN ISO 17632-A-T42 3 P C1 1 H5

Welding Position

- All position welding



Features & Benefits

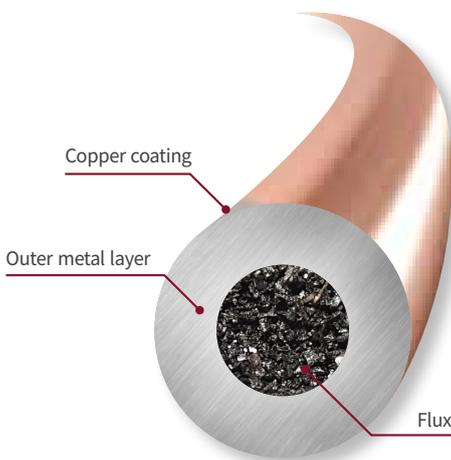

- Optimal protection against hydrogen induced cracking, due to ultra-low diffusible hydrogen content (under 3ml/100g weld metal)
- Stable welding arc with low spatter and perfect weld bead
- Good weldability in all positions and less post-weld cleaning
- Unique seamless structure allow excellent feedability and electrical conductivity
- Use 100% CO₂ shielding gas
- Excellent impact properties in low temperature, down to -30°C (-20°F) in pure CO₂ gas

SL-71

Mechanical Properties of All Weld Metal

Item	YS (MPa)	TS (MPa)	EL (%)	CVN Impact Value			
				Temp	Avg.(J)	Temp	Avg.(J)
SL-71	528	595	27.8	-20°C (0°F)	103	-30°C (-20°F)	91
AWS Spec.	≥400	490-660	≥22	Avg. ≥ 27J@ -30°C			


FCAM

Chemical Composition of All Weld Metal

Item	Chemical Composition (wt%)				
	C	Si	Mn	P	S
SL-71	0.047	0.37	1.47	0.011	0.007
AWS Spec.	≤ 0.12	≤ 0.9	≤ 1.75	≤ 0.03	≤ 0.03

Diffusible Hydrogen Generation

Shielding Gas	Diffusible Hydrogen Contents (ml/100g)				
	X1	X2	X3	X4	Avg.
C1 (100% CO ₂)	1.63	1.76	1.78	1.81	1.75

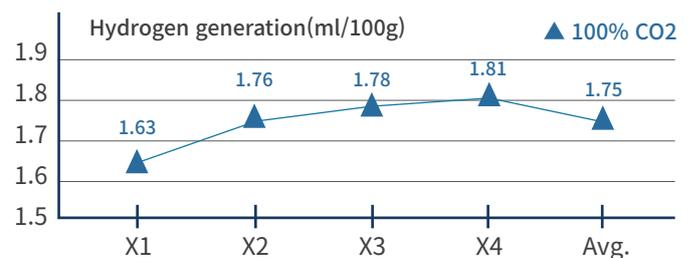

Packaging

Diameter	Spool	
	5kg (11lbs)	15kg (33lbs)
mm (in)		
1.2 (0.045)	V	V
1.4 (0.052)	V	V
1.6 (1/16)	V	V

Proper Welding Parameters

Item	1.2mm (0.045in)	1.4mm (0.052in)	1.6mm (1/16in)
Current(A)	180-300	250-350	300-400
Voltage(V)	22-32	25-33	25-35
Stick-out(mm)	15-20	15-20	18-25
Flow rate(l/min)	15-25	15-25	15-25